



GB04/4318



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8DD

26 OCT 2004

WIPO

PCT

## PRIORITY DOCUMENT


SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

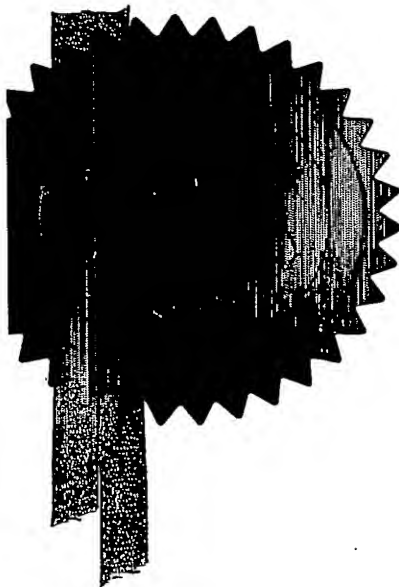

Signed


*Stephen Hordley*

Dated

18 October 2004

BEST AVAILABLE COPY

Patents Form 1/77

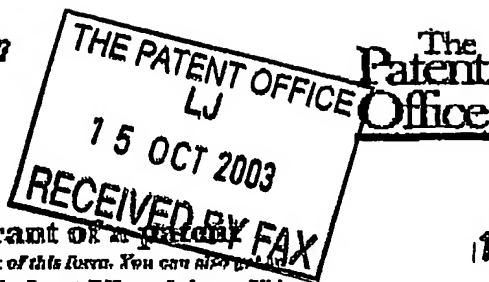Patents Act 1977  
(Rule 16)

1/77

**Request for grant of a patent**  
(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

15 OCT 2003

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RM

1. Your reference

GAB/P21895GB

15OCT03 E844834-1 000032  
P01/7700 0.00-0324146.02. Patent application number  
(The Patent Office will fill in this part)

0324146.0

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Wright Machinery Limited  
Stonefield Way  
South Ruislip  
Middlesex  
HA4 0JU

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

07881030001

4. Title of the invention

Vibratory Conveyor

5. Name of your agent (if you have one)

ELKINGTON AND FIFE

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

ELKINGTON AND FIFE  
PROSPECT HOUSE  
8 PEMBROKE ROAD  
SEVENOAKS  
KENT, TN13 1XR

Patents ADP number (if you know it)

67004 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer Yes if)

Yes

- a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See notes (d))

Patents Form 1/77

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 6

Claim(s) 2

Abstract -

Drawing(s) 2

only 8

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) -

Request for substantive examination (Patents Form 10/77) -

Any other documents (please specify) -

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

15/10/03

12. Name and daytime telephone number of person to contact in the United Kingdom

Graham Boon 01732 458881

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0845 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

## Vibratory Conveyor

This invention relates to a vibratory conveyor and, more particularly, to a vibratory conveyor element which is provided with a weighing device.

5

The principle underlying the use of a conveyor element having a weighing device is that a vibratory conveyor conveys a given product at a known velocity, so that if one knows the weight of product on the conveyor element one also knows the mass flow rate. Products which are transported by vibratory conveyors include such items as  
10 crisps and other snack foods. Flavourings and the like are commonly added to snack foods as they are being transported, and to ensure that the flavouring is applied at the correct rate it is important to know the mass flow rate of the product. The invention as described herein is particularly intended for use in conjunction with a system for adding a flavouring to a snack food product. It is to be understood, however, that it is of  
15 general application where it is desired to determine the weight of product which is on a vibratory conveyor at any given time.

EP-A-803715 describes a vibratory conveyor element provided with a weighing device.

In the apparatus described therein, the conveyor element is mounted on a base, and a  
20 load cell is disposed between the conveyor element and the base for sensing the weight of product on the conveyor element. The weight of the conveyor element itself is counterbalanced by another weight, so that only the weight of the product bears on the load cell. The above-mentioned base is connected to the upper ends of vibrating leaf springs, which thereby apply a vibrating drive force to the conveyor element via the  
25 base. However, it is inherent in this construction that the load cell is also subject to this

vibration, and this has the potential for disturbing the load cell readings and rendering them less accurate than would otherwise be the case. It is an object of the present invention to provide a vibratory conveyor element with a weighing device in such a way that this problem does not arise.

5

According to the present invention, there is provided a vibratory conveyor which comprises: a machine frame; a two-armed lever mounted on the frame for pivotal movement about an axis; a reaction base mounted on one arm of the lever; a conveyor element adapted to convey a product in a direction from a first end thereof toward a  
10 second end; at least one leaf spring connected between the conveyor element and the reaction base and arranged to vibrate so as to cause the conveyor element to convey product as aforesaid; and a sensor disposed between the said one arm and the machine frame for sensing the weight of product on the conveyor element; wherein a line connecting the said axis of pivotal movement and the centre of mass of the conveyor  
15 element runs perpendicular to the length of the or each leaf spring.

An embodiment of the invention is shown in the accompanying drawings, in which: Figure 1 is a side view of a vibratory conveyor incorporating the present invention; and Figure 2 is a sketch plan view showing the relative disposition of two components  
20 thereof (a reaction base and a two armed lever).

The embodiment shown in the drawing comprises a vibratory conveyor element 1 which is adapted to convey product rightwardly as shown in the drawing and which is provided with a weighing device, described in more detail below. Product, for example  
25 a snack food such as crisps, is fed to the upstream end of the conveyor element 1 by a

vibratory conveyor element 2 whose downstream end overlaps the upstream end of the conveyor element 1. It is to be understood that the conveyor element 2 might itself be fed by a further conveyor element (not shown) upstream thereof or, indeed, by a plurality of successive conveyor elements. It is also to be understood that the conveyor element 2 and/or any conveyor element or elements which feed it, need not be vibratory conveyor elements but could be of some other form, for example belt conveyors.

The vibratory conveyor has a base 3 which forms part of a machine frame and which carries two pairs of upstanding posts 4 and 5. The two posts 4, of which only one is visible in the drawing, are tied together by a bar 6 which, as seen in the drawing, extends perpendicular to the plane of the paper, and the two posts 5, of which only one is visible, are tied together by a similar extending bar 7. The bars 6 and 7 are in turn tied to one another by a bar 8. The posts 4 carry a structure 9 at their upper ends, to which are attached the lower ends of leaf springs 10. The upper ends of the leaf springs are secured to the underside of the conveyor element 2. Conventional means (not shown) are provided for causing the leaf springs 10 to vibrate in a direction perpendicular to their length, so as to cause product in the conveyor element 2 to travel rightwardly.

The conveyor element 1 is also provided with leaf springs, shown here as 11, to cause it to convey product rightwardly. The upper ends of the leaf springs are connected to the underside of the conveyor element 1, and the lower ends of the leaf springs are connected to a reaction base 12 which is at least approximately twice the mass of the conveyor element 1. The centre of mass of the reaction base 12 is at the location indicated in Figure 1 by the cross thereon. As shown in Figure 2, the reaction base

comprises a rearward main mass 12a from which two arms 12b extend forwardly. A respective plate 12c is connected to each arm 12b and extends laterally outwardly therefrom, and a respective plate 12d extends on either side of main mass 12a.

- 5 The reaction base 12 is connected to one arm 13 of what is, in effect, a two-armed lever, the other arm being shown as arm 14. The lever is mounted on a post 15, the lower end of which is connected to the frame 3, for pivotal movement about an axis 16. As shown in Figure 2, the arm 14 comprises two individual longitudinally extending arm members 14a. The ends of a counter mass 17 are mounted on the arm members 14a.
- 10 The counter mass 17 can be slid along the arm members, and clamped at a desired location on the arm members by clamps 17a. In use, the counter mass 17 is so positioned that it precisely balances the force applied to the arm 13 by the conveyor element 2 and the other structures connected to the arm 13. (Note that, contrary to what might appear from Figure 1, there is no connection between the clamps 17a and the bar
- 15 8, which is spaced from the clamps in the plane of the drawing).

- The arm 13 comprises two longitudinally extending arm members 13a. As seen in the plan view of Figure 2 these are each laterally outwardly of a respective one of the arms 12b of the reaction mass 12. As considered in side view, the arm members 13a extend
- 20 below the plates 12c, and below the plates 12d. Each of the plates 12c, 12d carries on its underside a downwardly facing cup 30. Each of the arms 13a carries two upwardly facing cups 31, each cup 31 being telescopically received with a respective one of the cups 30. A respective compression spring (not visible in the drawings) is received between each pair of telescopic cups. The springs serve to isolate the arms 13a from
- 25 vibration in the reaction base 12 caused by operation of the vibratory conveyor. This is

important in order to minimise vibration transmitted to the load cell (see below). Preferably the distances from the centres of each of these springs to the lines 23, marked as A and B in Fig 1, are substantially equal to one another. If, less advantageously, the arrangement of cups 30 and 31, and associated springs, were to be omitted, the lever arm 13 and reaction base 12 could be combined in a single component, and references to the lever arm and reaction base are to be understood accordingly.

The underside of the distal end of the arm 13 has a structure which carries an inverted cup 18, the lower end of which is telescopically received within an upwardly facing cup 19. A spring (not shown) is located within the two cups and between their bases, so that when a downward force is applied to the cup 18 this is transmitted to the cup 19 via the spring. The lower end of the cup 19 is connected to a bar 20 which forms part of a load cell 21. The load cell can be of conventional construction, and the arrangement is such that when the cup 19 moves downwardly the bar 20 flexes, and flexing movement is registered by the load cell and appears as an output thereof, indicative of the downward force applied by the cup 18. A stop 22 is positioned between the base 3 and the arm 13 to prevent excessive downward movement of the arm 13 which might damage the load cell 21.

20

The centre of mass of the conveyor element 1 is denoted by a cross thereon, and it will be seen that a straight line, indicated as 23, passes through the centre of mass of the conveyor element 1, the centre of mass of the reaction base 12 and the pivoting axis 16. It will also be seen that the line 23 runs perpendicular to the lengths of the leaf springs 11. Because of this arrangement, the forces generated by the vibrating movement of the



tray and the base run through the two centre of masses indicated and through the pivot 16, and there is no component of force which can pass through the load cell 21 and thus affect its output. Accordingly, what the load cell measures is purely the weight of product on the conveyor element 1. The output of the load cell can therefore be used to  
5 provide an accurate indication to, for example, a system for adding a flavouring to product on the conveyor element 1 in dependence on the mass flow rate of the product along that element.

## CLAIMS:

1. A vibratory conveyor which comprises:
  - a machine frame;
  - a two-armed lever mounted on the frame for pivotal movement about an axis;
  - 5 a reaction base mounted on one arm of the lever;
  - a conveyor element adapted to convey a product in a direction from a first end thereof toward a second end;
  - at least one leaf spring connected between the conveyor element and the reaction base and arranged to vibrate so as to cause the conveyor element to convey
  - 10 product as aforesaid; and
  - a sensor disposed between the said one arm and the machine frame for sensing the weight of product on the conveyor element;
  - wherein a line connecting the said axis of pivotal movement and the centre of mass of the conveyor element runs perpendicular to the length of the or each leaf
  - 15 spring.
2. A conveyor according to claim 1, wherein a vibration isolation means is provided between the reaction base and the said one arm of the lever.
- 20 3. A conveyor according to claim 2, wherein the said isolation means comprises at least one spring.
4. A conveyor according to claim 1, wherein the reaction base and the said one arm of the lever are provided by a single component.

5. A conveyor according to any preceding claim, wherein a counter-mass is mounted on other arm of the two-armed lever to counterbalance the force applied to the first arm when there is no product on the conveyor element.

5 6. A conveyor according to claim 5, wherein the position of the counter-mass is adjustable along the length of said other arm.

7. A conveyor according to any preceding claim, wherein the weight sensor comprises a load cell.

10

8. A conveyor according to any preceding claim, in combination with means for adding an agent to product on the conveyor element, in dependence on the weight sensed by the weight sensor.

15

9. A conveyor according to any preceding claim, further comprising at least one additional conveyor element upstream of the first mentioned conveyor element, for transporting product to the latter.

10. A conveyor according to any preceding claim, wherein the sensor  
20 receives load from the said one arm via a spring.

FIG 1

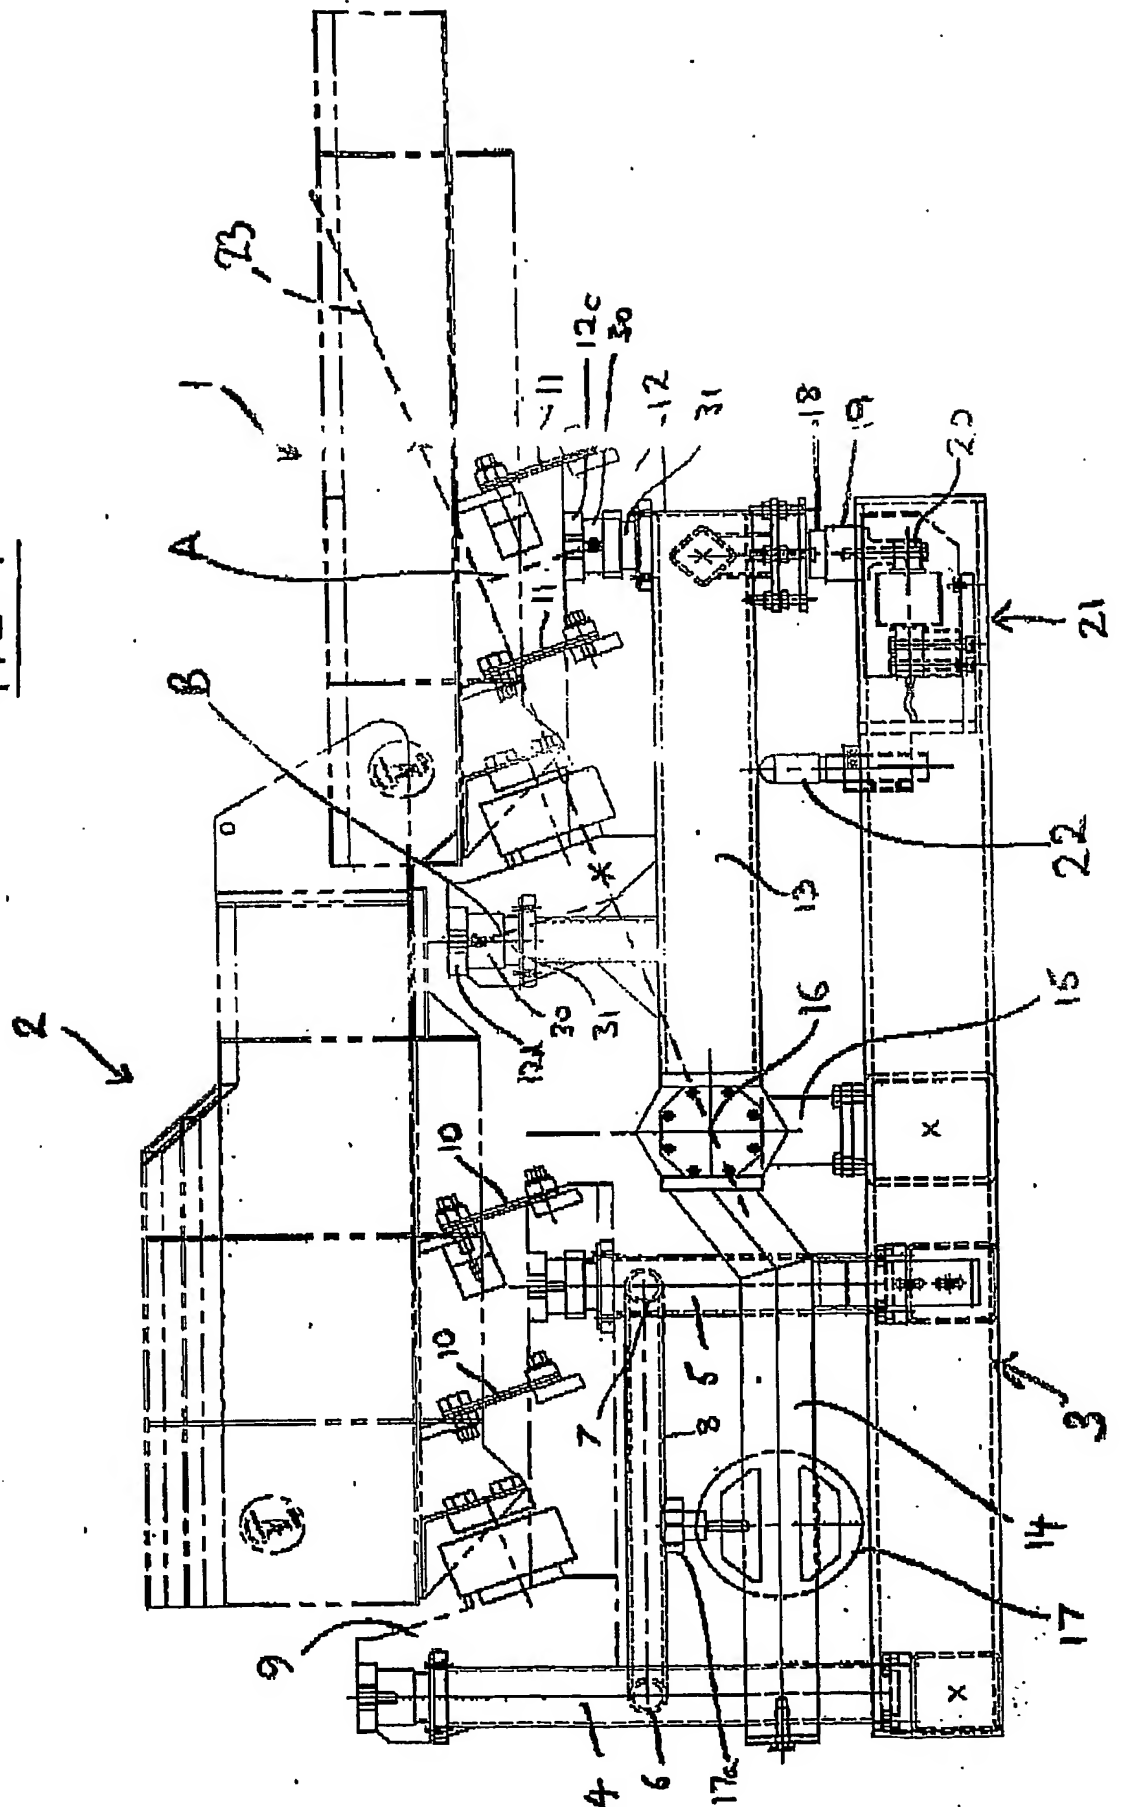
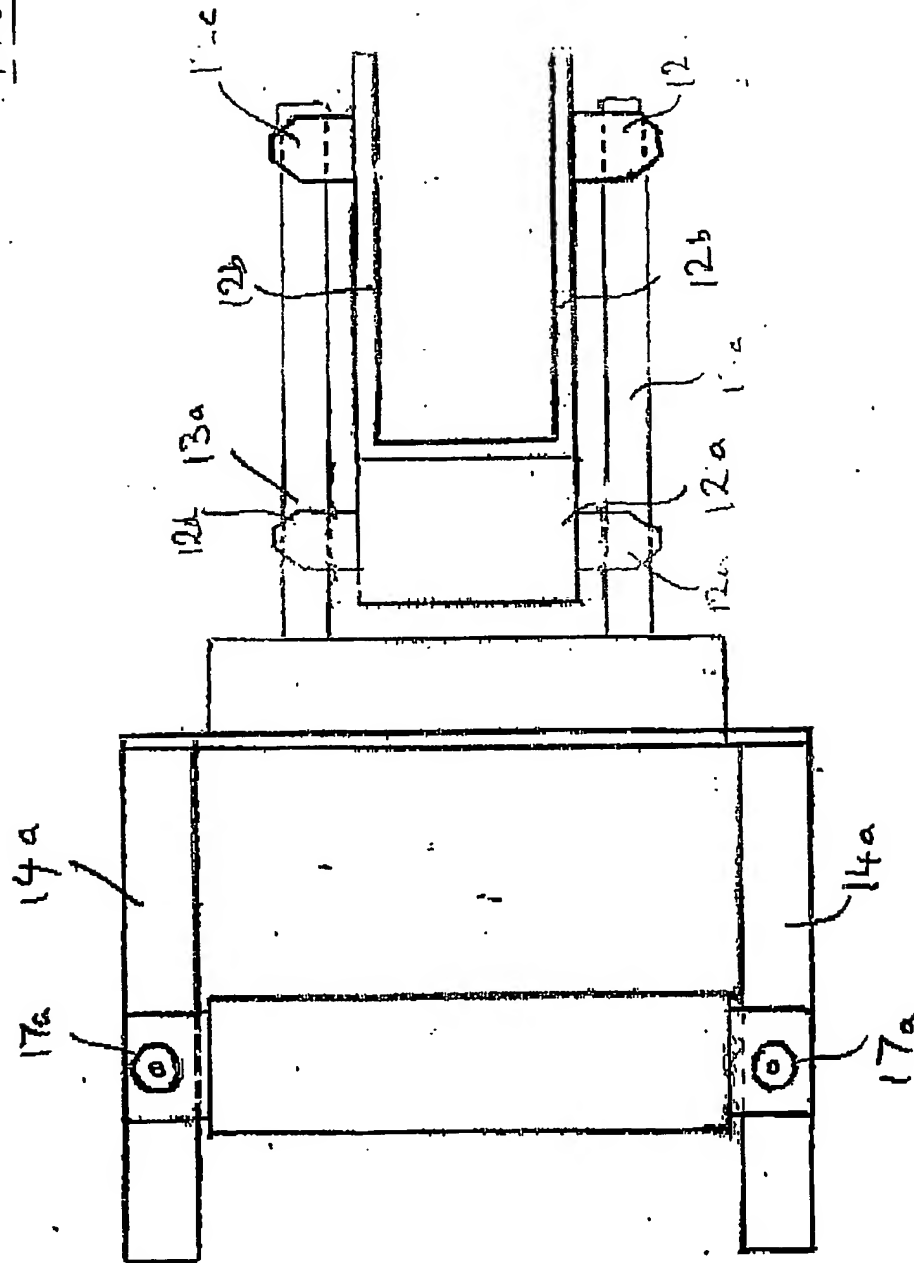


FIG 2

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**